

KIT NUMBER		
DBABU3005		


REF	DESCRIPTION	QTY
1	4000 T3 Slotted Rotors	2
2	Banjo Bolt	2
3	Copper Gasket	4
4	Brake Hose Kit	1
5	Caliper Bolt (M12-L65)	4
6	Spring Washer (TH.=3mm)	4
7	Caliper Assembly	2
8	Caliper Bleed Screw	4
9	Caliper Bracket Connecting Bolt (M14-P1.5)	O.E.
10	Adjusting Washer (M14-TH. 0.5mm)	8
11	Washer (M14-TH. 2.5mm)	4
12	Brake Pad	1 SET
13	Tension Spring	2
14	Retainer	4
15	Retainer Fixed Bolt	4
16	Retainer Fixed Nut	4
17	Caliper Bracket	2
18	Rotor Fixed Bolt	O.E.

TIGHTENING TORQUES	
Ref#	Torque (N-M)
2	25 - 27
5	65 - 68
8	7
9	O.E.STD.
15,16	17
18	O.E.STD.

BRAKE ROTOR WEAR	
NEW	MIN
Thickness 32 mm	30mm

BRAKE PAD WEAR	
Thickness 16 mm	8mm

**D-MAX RG
2020 ON
FRONT 6 POT
BRAKE KIT**


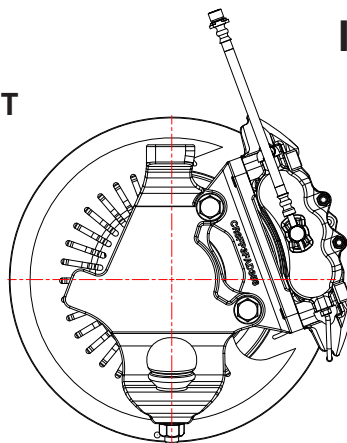


REAR SIDE VIEW

**INSTALLATION DIRECTION
(RIGHT HAND SIDE)**

The dust cover must be cut
- the rotor contact area.

bolt washer must be installed

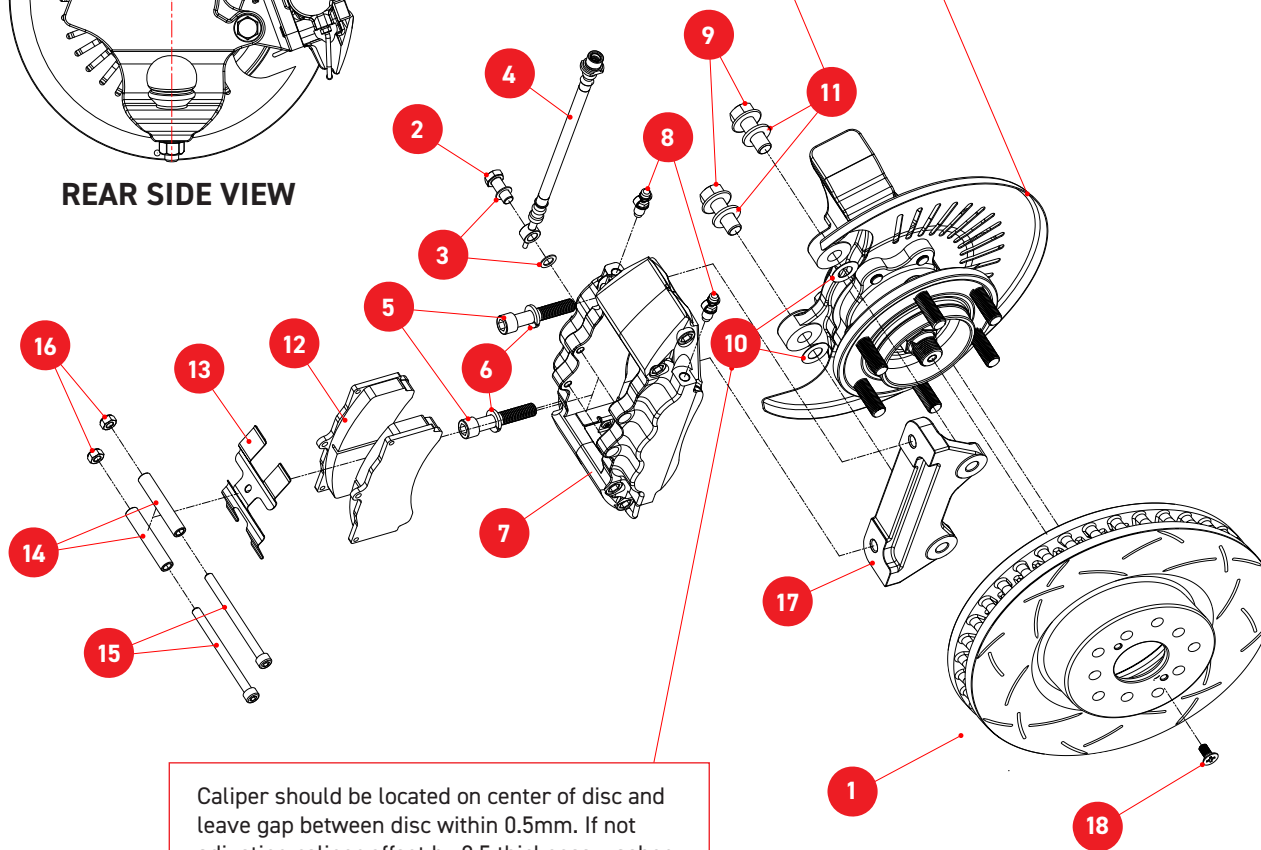


Caliper should be located on center of disc and leave gap between disc within 0.5mm. If not adjusting caliper offset by 0.5 thickness washer.

Application: D-MAX RG 2020 ON 6 POT BRAKE KIT


SPECIFICATIONS: CALIPER: 6FP3T SERIES/ROTOR SIZE: $\varnothing 356\text{mm}$ /WHEEL SIZE: 18" ON

PAPER SIZE SETTING= A4

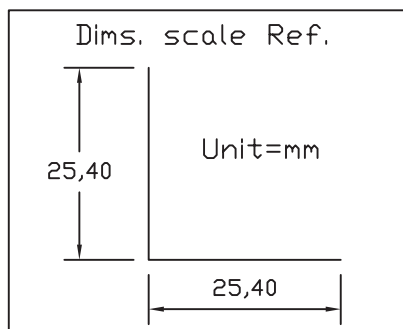

Please Check Scale When Printed
Printer Page Scaling select (none)
Printing scale = 1:1

101,00 [WHEEL SPIGOT]

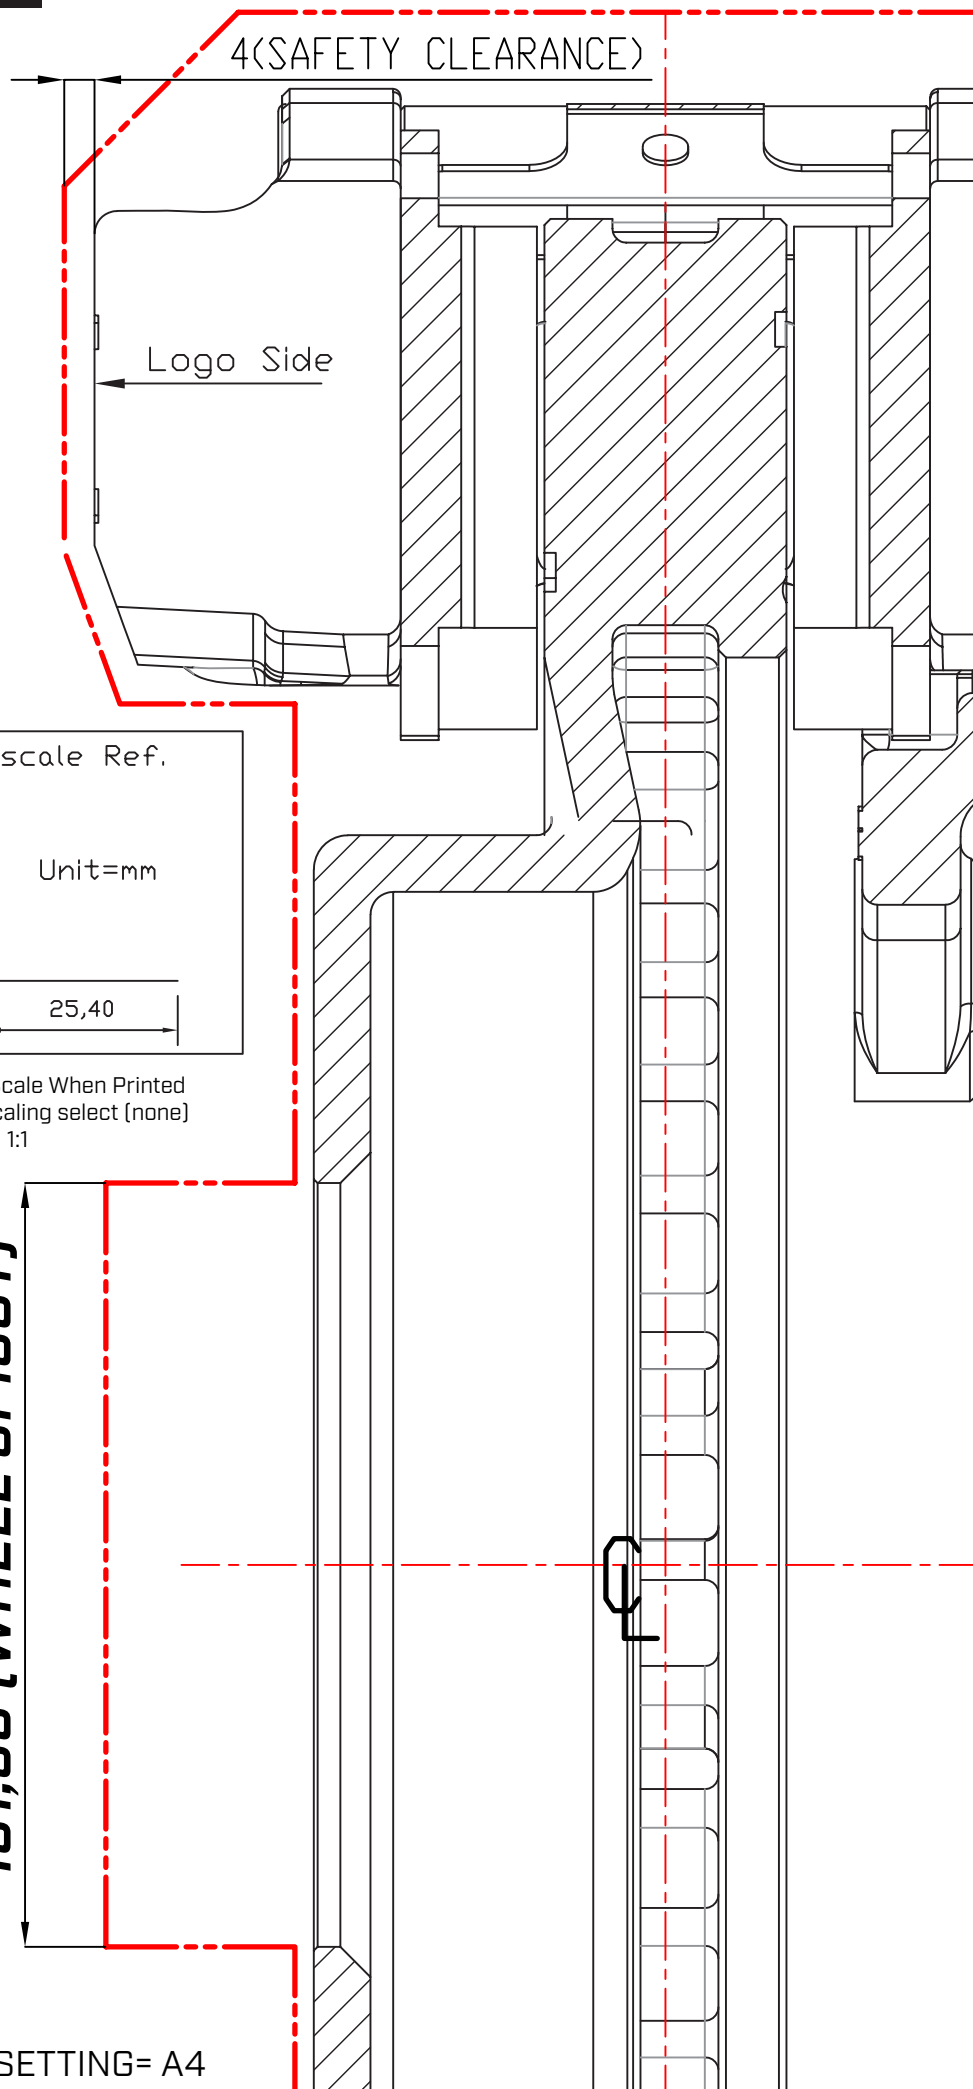

Cut Around Profile