


KIT NUMBER	
DBABU3009 & DBABU3011	

REF	DESCRIPTION	QTY
1	4000 T3 Slotted Rotors	2
2	Banjo Bolt	2
3	Copper Gasket	4
4	Brake Hose Kit	1
5	Caliper Bolt (M12-L65)	4
6	Spring Washer (TH.=3mm)	4
7	Caliper Assembly	2
8	Caliper Bleed Screw	4
9	Caliper Bracket Connecting Bolt (m12-P1.75)	O.E.
10	Adjusting Washer (M12-TH. 0.5mm)	8
11	Washer (M12-TH. 3mm)	4
12	Pad Set	1
13	Tension Spring	2
14	Retainer	4
15	Retainer Fixed Bolt	4
16	Retainer Fixed Nut	4
17	Caliper Bracket	2


TIGHTENING TORQUES	
Ref#	Torque (N-M)
2	25 - 27
5	65 - 68
8	7
9	O.E.STD.
15,16	17

BRAKE ROTOR WEAR	
NEW	MIN
Thickness 32 mm	30mm
BRAKE PAD WEAR	
Thickness 16 mm	8mm

FOR MORE INFO:
 **1800 739 039**



Bolt washer must be installed

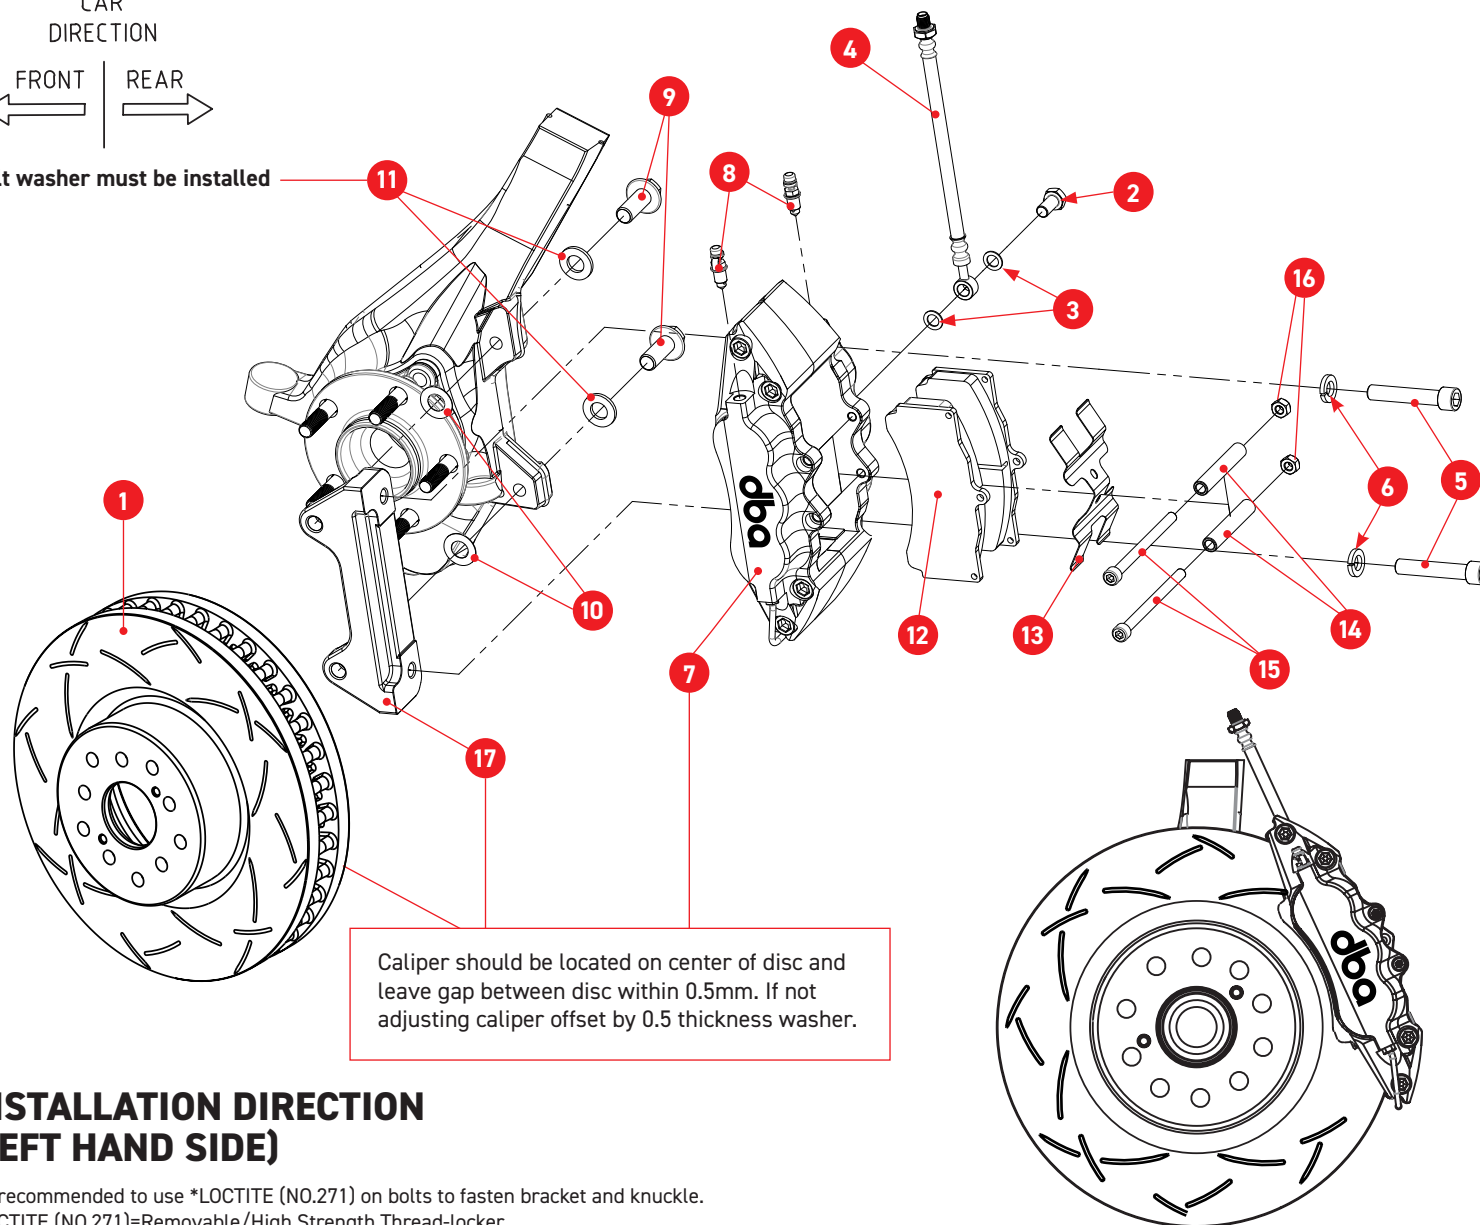

INSTALLATION DIRECTION (LEFT HAND SIDE)

It's recommended to use *LOCTITE (NO.271) on bolts to fasten bracket and knuckle.
*LOCTITE (NO.271)=Removable/High Strength Thread-locker

70,5 (WHEEL SPIGOT)

4

62 Disc Offset


Cut Around Profile

208

FORD FALCON
ROTOR SIZE $\varnothing 356\text{mm}$

PAPER SIZE = Letter

Dims scale Ref.



Please Check Scale When Printed
Printer Page Scaling select (none)
Printing scale = 1:1